


2000nm Polarization Maintaining Fiber Patchcord

Features	
Low Insertion Loss High Extinction Ratio High stability and reliability	
Application	
Fiber Laser Fiber Amplifier Testing Instrument Optic lab use	

Specifications

Parameter		Value
Connector Type		FC/UPC, SC/UPC,LC/UPC ,FC/APC, SC/APC, LC/APC
Wavelength (nm)		2000
Insertion Loss (dB)	UPC Type	≤0.3
	APC type	≤0.4
Return loss (dB)	UPC Type	≥50
	APC type	≥60
Extinction Ratio (dB)		≥23
Fiber Type		PM1550 or Nufern PM1950 fiber
Key Orientation		Slow Axis
Axis Alignment (deg)		±3
Operating temperature (°C)		-5~+70
Storage temperature (°C)		-40 ~ +80

Package Dimensions

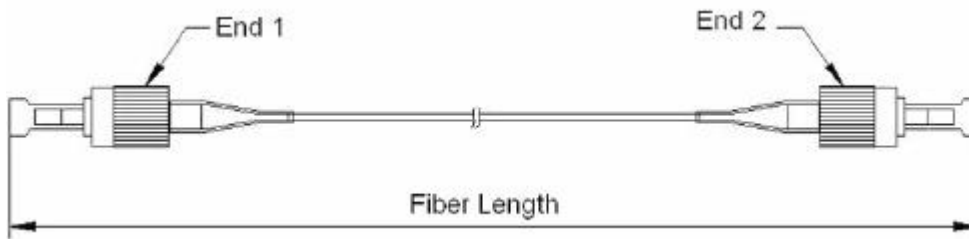

Ordering Information

PMJP	Connector End1	Connector End 2	Wavelength	Pigtail Type	Fiber Type	Fiber Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	2000=2000	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	5=PM1550 9=Nufern PM1950 fiber	1=1m 2=2m X=Other