


## 2000nm Polarization Maintaining Fiber Patchcord

<b>Features</b>	
Low Insertion Loss High Extinction Ratio High stability and reliability	
<b>Application</b>	
Fiber Laser Fiber Amplifier Testing Instrument Optic lab use	

### Specifications

Parameter		Value
Connector Type		FC/UPC, SC/UPC,LC/UPC ,FC/APC, SC/APC, LC/APC
Wavelength (nm)		2000
Insertion Loss (dB)	UPC Type	≤0.3
	APC type	≤0.4
Return loss (dB)	UPC Type	≥50
	APC type	≥60
Extinction Ratio (dB)		≥23
Fiber Type		PM1550 or Nufern PM1950 fiber
Key Orientation		Slow Axis
Axis Alignment (deg)		±3
Operating temperature (°C)		-5~+70
Storage temperature (°C)		-40 ~ +80

### Package Dimensions

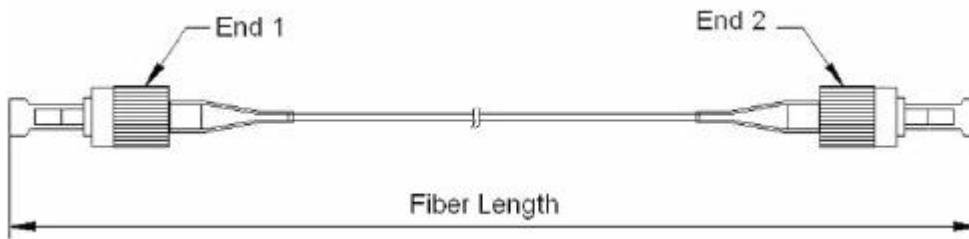

### Ordering Information

PMJP	Connector End1	Connector End 2	Wavelength	Pigtail Type	Fiber Type	Fiber Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	2000=2000	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	5=PM1550 9=Nufern PM1950 fiber	1=1m 2=2m X=Other