

## Single/Dual Fiber Collimator


<b>Features</b>	
Low IL & High Return Loss Epoxy Free In Optical Path Environmental Stability	
<b>Application</b>	
Isolator, Circulator, FWDM, CWDM etc	

### Specification

Parameter		Value			
Operating wavelength(nm)	1310, 1550,or1310/1550	1064	980	850	
Bandwidth(nm)	±30	±30	±20	±20	
Working Distance(mm)	5 or specify				
Typ Insertion Loss (dB)	0.2	0.25	0.25	0.25	
Insertion Loss (dB)	≤0.25	≤0.3	≤0.3	≤0.35	
Return loss(dB)	≥60	≥60	≥55	≥55	
PDL (dB)	≤0.02	≤0.02	≤0.02	≤0.02	
Optical Power (mW)	≤500	≤300	≤300	≤300	
Fiber Type	SMF28e	HI1060	HI1060	HI780	
Dimmension (mm)	1.8(OD) Lens	3.2x10 Metal holder or 2.78x9.0 Glass tube			
	1.0(OD) Lens (only 1310,1550nm)	2.4x10 Metal holder or 1.4x 7mm Glass tube			
Operating Temperature(°C)	-5 ~ +70				
Storage Temperature(°C)	-40~ + 85				

Above spec are for collimator without connector.

### Package Dimension(mm)

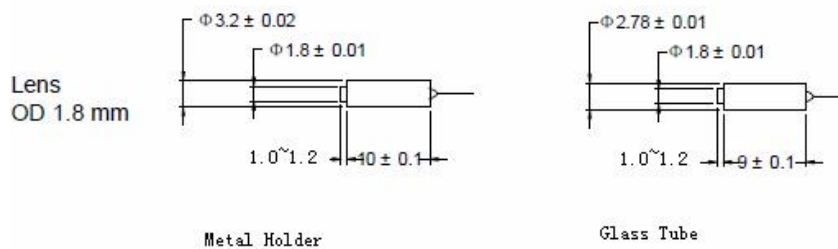

### Ordering Information

CL	Type	Wavelength	Lens Diameter	Lens Type	Working Distance	Pigtail Type	Fiber Type	Length	Connector	Package
	S=Single fiber D=Dual fiber	850 980 1064 980/1064 1310 1550 1310/1550	1.8mm 1.0mm	C= C lens G= G lens	5=5mm, X=Specify	250=250um bare fiber 900=900um loose tube	1=SMF-28e 4= HI1060 X=Other	1=1m X=Other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other	3.2x10 2.78x9 1.8x7 1.4x8