


## Mini Size Faraday Mirror

<b>Features</b>	
Low Insertion Loss Compact Size Environmental Stability	
<b>Application</b>	
EDFA DWDM System Fiber Instruments Fiber Sensor	

### Specifications:

Parameter	Value
Operating wavelength (nm)	1310 or 1550
Operating bandwidth (nm)	±15
Insertion loss (dB)	≤0.6
Faraday Rotation Angle(single pass) (°C)	45
Maximum Rotation angle tolerance over wavelength range at 23°C (°C)	±3
PDL (dB)	≤0.05
PMD (ps)	≤0.05
Power handling (mW)	≤500
Fiber Type	SMF-28e
Operating temperature(°C)	-5 ~ +70
Storage temperature(°C)	-40~ +85
Package dimensions(mm)	Φ3.2×L12

### Package Dimensions:

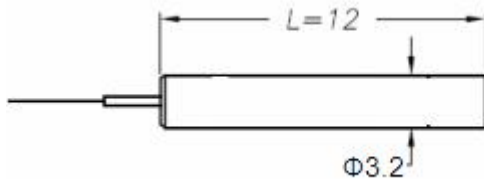

### Ordering Information

FM	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Size
	1310 1550	250= 250um bare fiber 900= 900um loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC ST=ST/UPC LC=LC/UPC XX=Other	Φ3x12