


## Fiber Patchcord

<b>Features</b>	
Low Insertion Loss High Return Loss & High Repeatability	
<b>Application</b>	
LAN, Data network CATV Network Telecommunication	

### Specifications:

Parameter		Value
Connector Type		FC,SC,ST, LC, MU, etc
Operating Wavelength (nm)		1310/1550
Fiber Type		Single Mode
		SMF-28e
Insertion loss (dB)		≤0.25
Return loss (dB)	UPC	≥50
	APC	≥60
Repeatability (dB)		≤0.1
Changeability (dB)		≤0.2
Durability		≥1000
Operating temperature (°C)		-40 ~ + 85

### Package

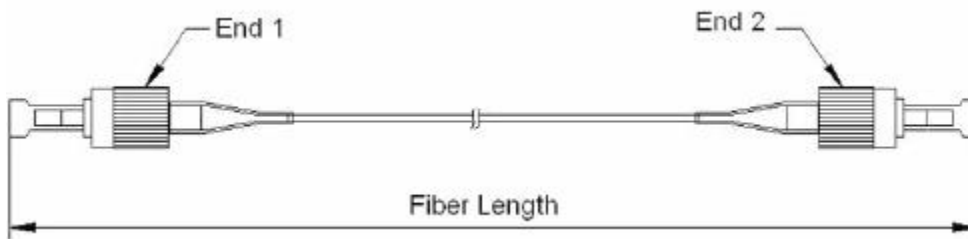

### Ordering Information

JP	Connector (End 1)	Connector (End2)	Wavelength	Pigtail Type	Fiber Type	Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC MU=MU/UPC	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC MU=MU/UPC	1310/1550	250=250um bare fiber 900T=900um tight buffer 2000C=2mm cable 3000C=3mm cable	1=SMF-28e 2=50/125 MM 3=62.5/125 MM 4=H11060Flex X=Other	1=1m X=Specify