


## Fiber Patchcord (850nm, 980nm, 1064nm)

<b>Features</b>	
Low Insertion Loss High Return Loss & High Repeatability	
<b>Application</b>	
LAN, Data network CATV Network Telecommunication	

### Specifications:

Parameter	Value	
Connector Type	FC,SC, LC, etc	
Operating Wavelength (nm)	980/1060	850
Fiber Type	HI1060Flex or HI1060 or 10/125 SCF Or 20/125 SCF	HI780
Insertion loss (dB)	≤0.4	≤0.8
Return loss (dB)	UPC	≥50
	APC	≥60
Durability	≥1000	
Operating temperature (°C)	-40 ~ + 85	

### Package

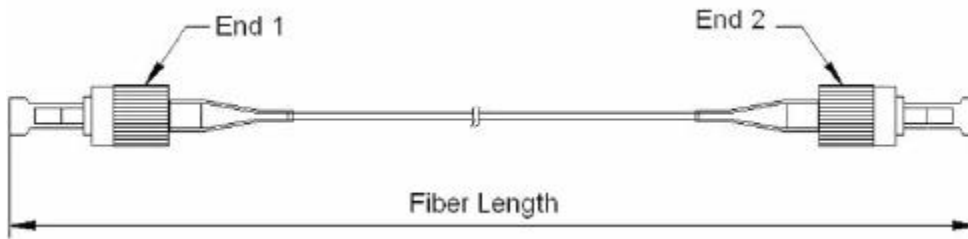

### Ordering Information

JP	Connector (End 1)	Connector (End2)	Wavelength	Pigtail Type	Fiber Type	Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	850 980 1064	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	4=HI1060Flex 7=HI780 Fiber 8=HI1060 9=10/125 SCF 10=20/125 SCF	1=1m X=Specify