


PM Fiber Pigtail

Features	
High Reliability Accurate polishing angle	
Application	
PM Collimator	


Specifications

Parameter	Value
AR Coating	850,1064,1310, 1550, or Other
Bandwidth (nm)	±40
Angle Polish	0°, 8°, or any other degree
Capillary Diameter(mm)	1.0±0.005 or 1.8±0.005
Scratch/Dig	10/5
Extinction Ratio(dB)	≥25
Tolerance of Stress Axis Deviation	±3°
AR Coating	R<0.25%@ specified wavelength range
Dimension (mm)	1.8(OD): 5~6.5(L); 1.0(OD):5~5.5(L)
Pigtail Type	250um bare fiber
Fiber Type	Panda Fiber

Package Dimensions

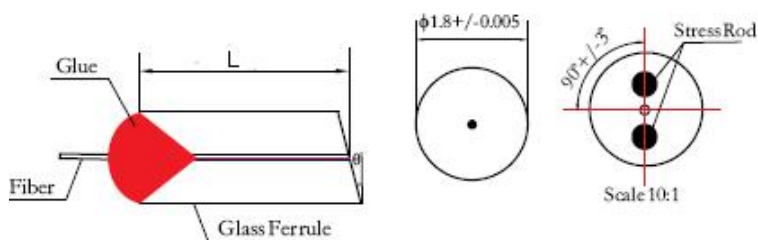

Single Fiber Pigtail

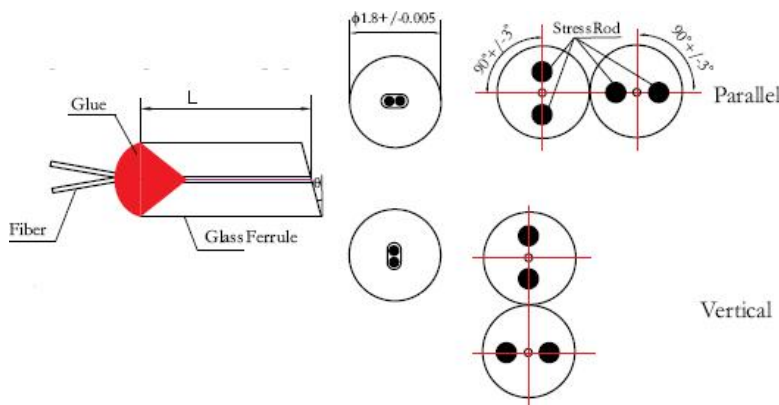

Dual Fiber Pigtail

Ordering Information

PM PIGT	Configuration	AR Coating	Angle Polish	Pigtail	Fiber	Length
	S=Single fiber	850	0=0°	0=250um bare fiber	5=Panda fiber	1m
	D=Dual Fiber	1064 1310 1550	0=8°			S=Specify