


Fiber Patchcord (850nm, 980nm, 1064nm)

| | |
|---|--|
| Features | |
| Low Insertion Loss High Return Loss & High Repeatability | |
| Application | |
| LAN, Data network CATV Network Telecommunication | |

Specifications:

| Parameter | | Value | |
|----------------------------|-----|--|-------|
| Connector Type | | FC,SC, LC, etc | |
| Operating Wavelength (nm) | | 980/1060 | 850 |
| Fiber Type | | HI1060Flex or HI1060 or 10/125 SCF Or 20/125 SCF | HI780 |
| Insertion loss (dB) | | ≤0.4 | ≤0.8 |
| Return loss (dB) | UPC | ≥50 | ≥50 |
| | APC | ≥60 | ≥60 |
| Durability | | ≥1000 | |
| Operating temperature (°C) | | -40 ~ + 85 | |

Package

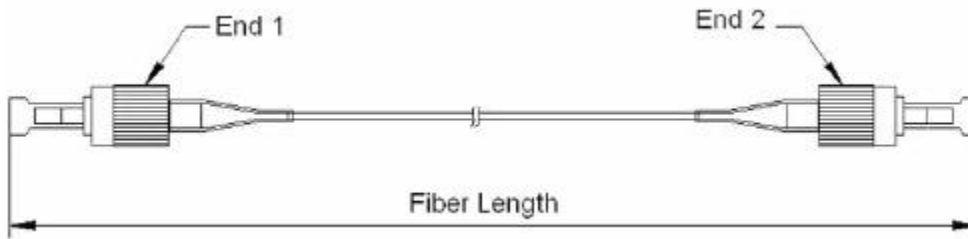

Ordering Information

| JP | Connector (End 1) | Connector (End2) | Wavelength | Pigtail Type | Fiber Type | Length |
|----|---|---|--------------------|--|--|-------------------|
| | NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC | NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC | 850 980 1064 | 250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube | 4=HI1060Flex 7=HI780 Fiber 8=HI1060 9=10/125 SCF 10=20/125 SCF | 1=1m X=Specify |