


Multimode Fiber Optical Circulator

Features	
High isolation & High Return Loss	
Low insertion loss & PDL	
Optical Path Epoxy Free	
Application	
EDFA,DWDM and OTDR	
DWDM and OADM networks	
Bi-directional transmission system	

Specifications

Parameters	3 Port
Operating Wavelength(nm)	1550
Bandwidth (nm)	± 30
Insertion Loss (dB)	≤ 1.20
PDL(dB)	≤ 0.20
Isolation (dB)	≥ 30
Directivity (dB)	≥ 40
Return Loss (dB)	≥ 40
Power Handling (mW)	≤500
Fiber Type	50/125 or 62.5/125 MM
Operating Temperature(℃)	-5-70
Storage Temperature(℃)	-40-85
Dimension (mm)	∅ 5.5×82

Package Dimensions

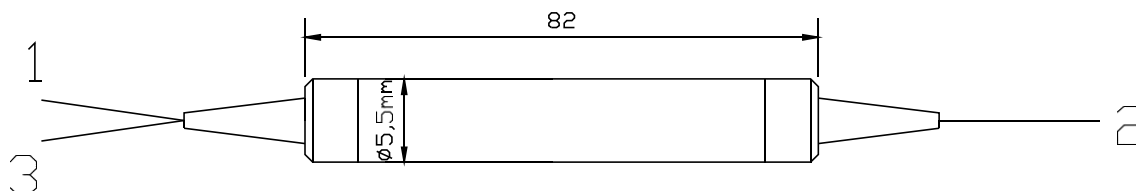



Ordering Information

CIR	Type	Wavelength	Pigtail Type	Length	Fiber Type	Connector
	3=3 Port	13=1310 15=1550	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	1= 1m	2=50/125 MM 3=62.5/125 MM	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others