


## 1064nm Polarization Insensitive Optical Circulator

<b>Features</b>	
High isolation & High Return Loss Low insertion loss & PDL	
<b>Applications</b>	
Fiber Laser Laboratory	

### Specifications

Parameter	Type	3 Port
Operating wavelength (nm)		1064
Bandwidth(nm)		±10
Isolation(dB)		≥20(Typ.25dB)
Insertion Loss (dB)		≤2.1(Typ 1.8)
PDL (dB)		≤0.2
Return loss (dB)		≥50
Cross Talk (dB)		≥45
Power handling (mW)		≤300
Fiber Type		HI1060
Operating temperature (°C)		0 ~ +70
Storage temperature (°C)		-40 ~ +85
Dimensions (mm)		34x8.4x8.4

### Package Dimension

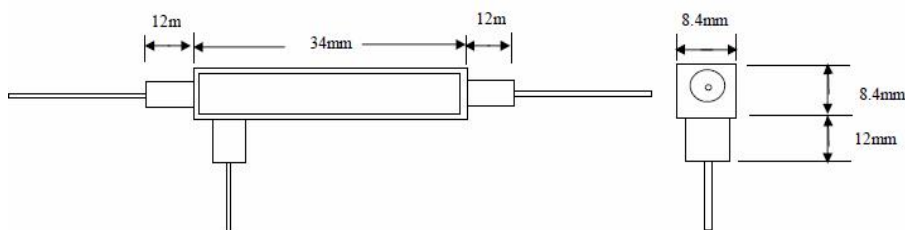

### Ordering Information

CIR	Type	Wavelength	Pigtail Type	Length	Fiber Type	Connector	Package
	3=3 Port	1064	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	0.8=0.8m 1=1m	4=HI1060	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others	34x8.4x8.4