


1064nm High Power Collimated Beam Output Isolator (10-30W)

Features	
Low Insertion Loss & PDL High Isolation Extinction Ratio High stability and reliability	
Application	
Fiber Laser	

Specifications

Parameters	Non-PM fiber (HPCI)	PM fiber (HPMCI)
Center Wavelength (λ_c) (nm)	1064	
Operating Wavelength Range(nm)	± 10	
Peak Isolation (dB)	30~35dB	
Isolation at 23°C (dB)	≥ 25 dB	
Transmission (%)	≥ 90 (Typ. 93%)	
Return Loss (dB)	≥ 50	
PDL (dB)	<0.15	--
Extinction Ratio (dB)	--	≥ 20 dB
Fiber Type	20/125, 25/250 DC LMA fiber	PM20/125, PM25/250 DC LMA fiber
Nominal Output Beam Diameter (mm)	8mm or Specify	
Optical Power	Average 10,20,30W or Specify Peak Power 10Kw, 20Kw	
Operating Temperature(°C)	-0 to +50	
Storage Temperature(°C)	-20 to +75	

Package Dimensions

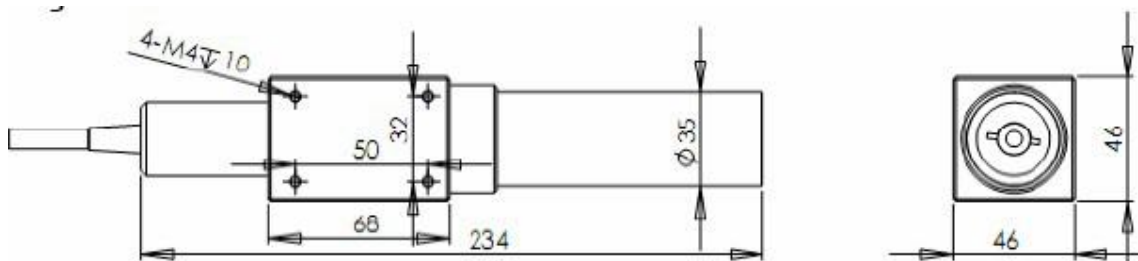

Ordering Information

HPCI HPMCI	Wavelength	Working axis	Output beam diameter	Input Pigtail	Fiber	Input length	Power
	1064	F=Fast axis Blocked	8=8mm S=Specify	3=3mm loose tube 3AC=3mm Armored Cable 6AC=6mm Armored Cable	10/125DC 20/125DC S=Specify	2=2m S=Specify	20W 30W S=Specify