


1064nm Manual Variable Optical Attenuator (MVOA)

Features	
High precision Wide attenuation range Low Insertion Loss Compact size	
Application	
Optical communication systems test Optics lab use	

Specifications:

Parameter	Type	1064
Wavelength (nm)		1064 ± 20
Attenuation range (dB)		0.6 ~ 60
Insertion Loss (dB)		≤0.6
Return loss (dB)		≥50
Fiber Type		HI1060
Adjustment Precision (dB)		0.02
PDL (dB)		≤0.15
Operating temperature (°C)		0 ~ +70
Storage temperature (°C)		-40 ~ +85
Dimension (mm)		26 x 16 x 8

Package Dimensions

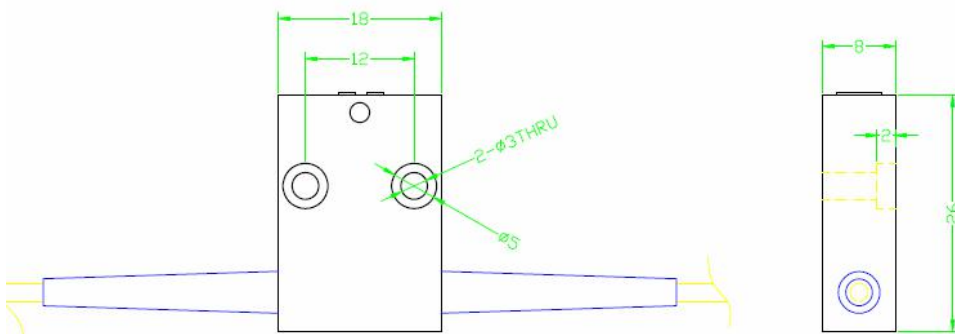

Ordering Information

MVOA	Wavelength	Adjustment Type	Pigtail Type	Fiber Type	Length	Connector
	1064	1= Hand adjustment	900=900um tube 2000=2mm tube 3000=3mm tube	4=HI1060	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC MU=MU/UPC XX=Other