


L Band Supervisory Channel Filter WDM

Features	
Low Insertion Loss High Isolation High Stability and reliability	
Application	
WDM systems CATV EDFA	

Specifications

Parameter	1625/1585 FWDM
Pass wavelength (nm)	1620 ~ 1630
Reflection wavelength (nm)	1570~1605
Pass insertion loss (dB)	≤0.6
Reflection insertion loss (dB)	≤0.4
Pass channel isolation (dB)	≥30
Reflection isolation (dB)	≥12
Channel flatness (dB)	≤0.3
Directivity (dB)	≥55
Return loss (dB)	≥50
PDL (dB)	≤0.1
Wavelength thermal stability (nm/°C)	≤0.003
Insertion loss thermal stability (dB/°C)	≤0.005
Power handling (mW)	≤300
Operating temperature (°C)	0 ~ +65
Storage temperature (°C)	-40 ~ +85
Dimensions (mm)	φ5.5×L34

Package Dimensions

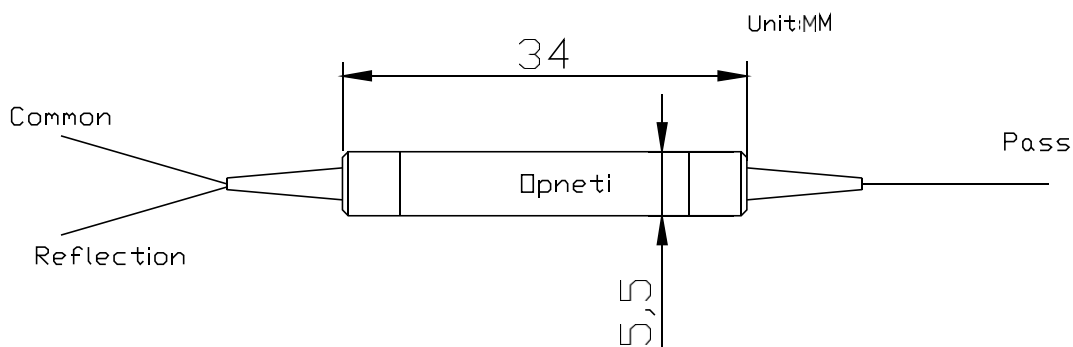



Ordering Information

FWDM	Port Type	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	1x2	1620~1630T/ 1570~1605R	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC MU=MU/UPC XX=Other